




EZ KLEEN[®]

METAL MESH AIR FILTERS

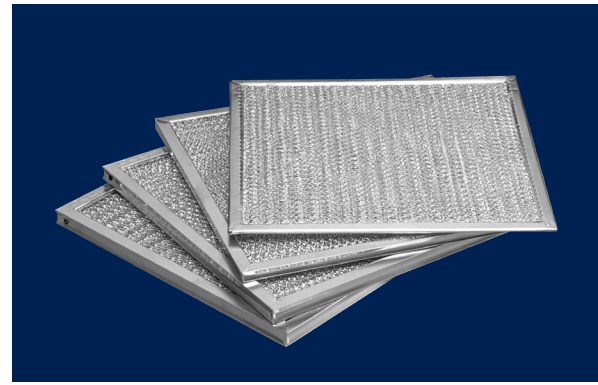

PERFORMANCE DATA

Air Filter	Stock Size (H x W x D) Nominal	Stock No.	Performance		
EZ KLEEN UL 900 Classified Rated Velocity 150-650 FPM (0.76-3.31 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)				1" EZ Klean Filters	
	20" x 25" x 1"	9801	1" (25mm) & 3/32" (2.4mm)	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	20" x 20" x 1"	9802		Average Arrestance	54%
	16" x 25" x 1"	9803	Clean Resistance	0.045" w.c. 0.011 kPa	0.09" w.c. 0.023 kPa
	16" x 20" x 1"	9804		Dust-Holding Capacity	95 gms/ft ² (1023 gms/m ²)
	15" x 20" x 1"	9805	2" EZ Klean Filters	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
10" x 20" x 1"	9806	Average Arrestance		72%	68%
MIST ELIMINATOR UL 900 Classified Rated Velocity 150-650 FPM (0.76-4.58 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)	20" x 25" x 2"	9151	Clean Resistance	0.07" w.c. 0.018 kPa	0.14" w.c. 0.035 kPa
	20" x 20" x 2"	9152		Dust-Holding Capacity	130 gms/ft ² (1399 gms/m ²)
	16" x 25" x 2"	9153	2" Industrial Filters	At 350 fpm (1.78 m/s)	At 520 fpm (2.64 m/s)
	16" x 20" x 2"	9154		Average Arrestance	67%
	15" x 20" x 2"	9155	Clean Resistance	0.05" w.c. 0.013 kPa	0.10" w.c. 0.025 kPa
	10" x 20" x 2"	9156		Dust-Holding Capacity	143 gms/ft ² (1539 gms/m ²)
24" x 24" x 2"	9157	INDUSTRIAL EZ KLEEN UL 900 Classified Rated Velocity 150-900 FPM (0.76-4.58 m/s) Optimum Velocity 350-520 FPM (1.78-2.64 m/s)	1/4" Trim-To-Size*		5/8" Trim-To-Size*
20" x 25" x 2"	901		Average Arrestance	At 350 fpm (1.78 m/s)	At 350 fpm (1.78 m/s)
20" x 20" x 2"	902			Clean Resistance	0.07" w.c. 0.018 kPa
16" x 25" x 2"	903		Clean Resistance	100 gms/ft ² (1075 gms/m ²)	95 gms/ft ² (1023 gms/m ²)
16" x 20" x 2"	904			EZ Klean Filters 3/32", 3/8", 1/2"	
15" x 20" x 2"	905		3/32", 3/8", 1/2" Nominal Frame Thickness	At 350 fpm (1.78 m/s)	
10" x 20" x 2"	906	Average Arrestance	64%		
TRIM-TO-SIZE EZ KLEEN UL 900 Classified	15" x 24" x 1/4"	9200	Clean Resistance	0.06" w.c. 0.016 kPa	
	40" x 64" x 1/4"	9250	Clean Resistance	0.06" w.c. 0.016 kPa	
	40" x 64" x 5/8"	9251		Dust-Holding Capacity	44 gms/ft ² (474 gms/m ²)
	40" x 50" x 1/4"	9260			
	40" x 50" x 5/8"	9261			
MADE-TO-ORDER EZ KLEEN UL 900 Classified Minimum quantities may apply.			EZ Klean Filters 3/32", 3/8", 1/2"		
			3/32", 3/8", 1/2" Nominal Frame Thickness	At 350 fpm (1.78 m/s)	
			Average Arrestance	64%	
			Clean Resistance	0.06" w.c. 0.016 kPa	
			Dust-Holding Capacity	44 gms/ft ² (474 gms/m ²)	